


凌科自动化

User Manual

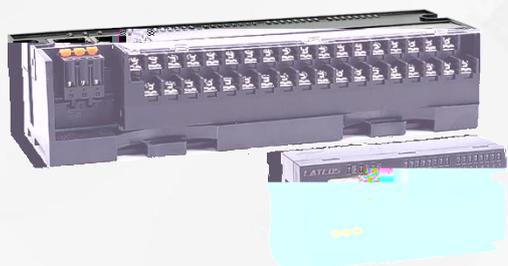

JP

ETHERNET/IP
Remote IO Mod
IO



(Ethernet/IP) ODVA

IP20

V1.0	2023.02.10	

IEC11631-22007 Programmable controllers -Part 2:Equipment requirements and tests

IEC/TR 61158 -

IEC61784-1 -

JP-EP

DI 2

1		16
2		2 bytes
3	Ton	Type. 18uS / Max. 35uS
4	Toff	Type. 135uS / Max. 250uS
5		
6		
7		24 V DC (-15 %/+ 20 %), (IEC 61131-2, type 2)
8	"0"	-3...+5 V (IEC 61131-2, type 2)
9	"1"	15...30 V (IEC 61131-2, type 2)
10		Typ. 10mA/Ch (IEC 61131-2, type 2)
11		/ 500V DC

MOSFET DQ 3

1		16
2		2 bytes
3	Ton	Type. 12uS / Max. 25uS
4	Toff	Type. 10mS / Max. 20mS ()
5		
6		
7		
8		24 V DC (-15 %/+ 20 %), (IEC 61131-2, type 2)
9		Max. 0.5 A /Ch,
10		8A

ETHERNET/IP

4

1		ETHERNET/IP
2		10/100 Mbaud
3		RJ45 IEEE 802.xx
4		MAC
5		CAT5e
6	ETHERNET/IP	(MRP)
7		1500V DC IEC61000-4-2

3

MOSFET

3

24V DC (-15 %/+ 20 %) 0.5A

I/O

500V DC

24V DC (-15 %/+ 20 %) 16*10mA

I/O

500VDC


MOSFET

24V DC (-15 %/+ 20 %) 16*0.5A

I/O

500VDC

mm 32 JP I/O 16 111 * 50 * 40 W/H/D
 IP20 180 * 50 * 40 W/H/D mm h=5.5mm

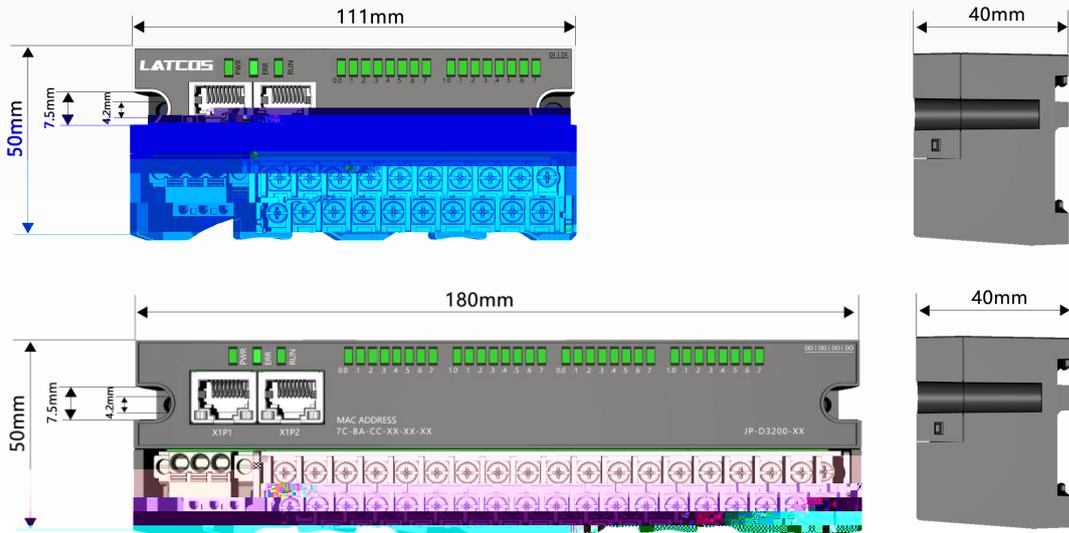


2


DIN

75 mm


25 mm

TS35/7.5

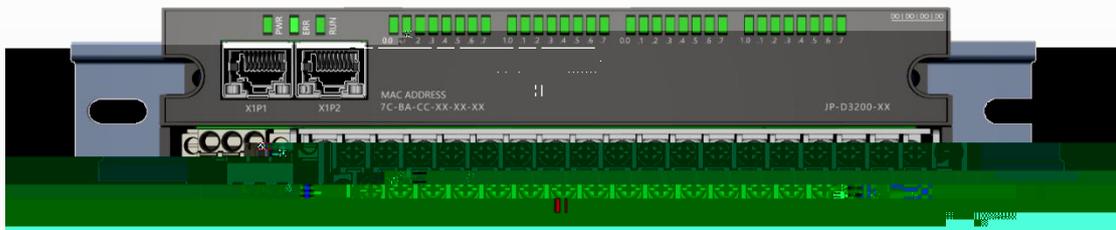

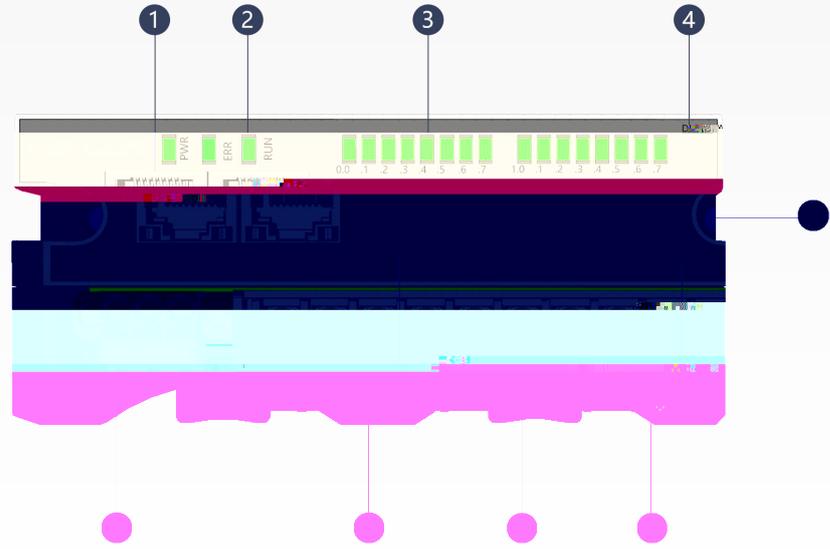

	RJ45 *2	PLC PC
		IO
		8
		-
		-
	IO	IO
	MAC	MAC

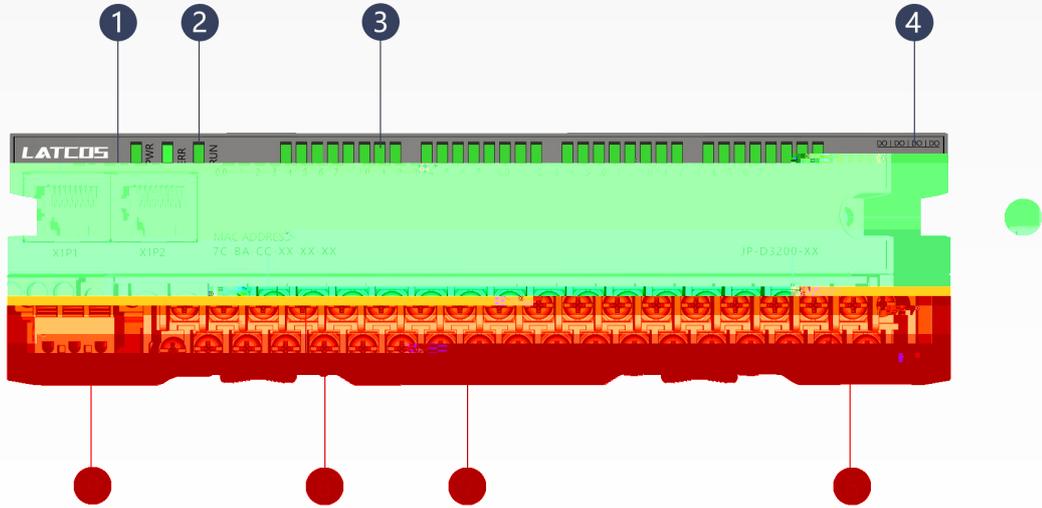


	RJ45	*2	PLC PC
			IO
		8	
			-
			-
	IO		IO
	MAC		MAC

"1" / / LED / "0"

RJ45 RJ45 Hub

7 RJ45

○		RJ45
●		RJ45
	○	RJ45
	●	RJ45






	24V
	0V

I/O 24V DC (-15 %/+ 20 %) 0.5A
500V DC





JP-D0808P-EP

8 PNP
8 PNP

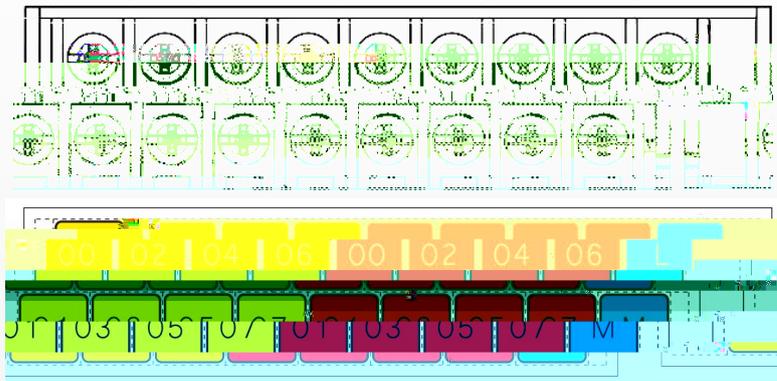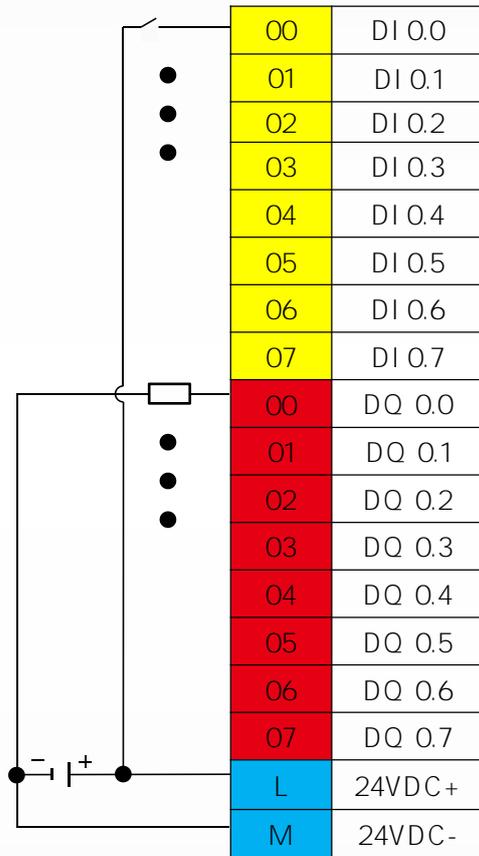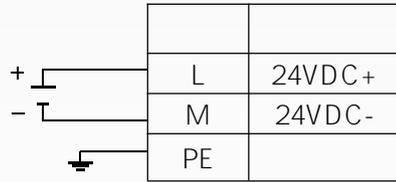





JP-D0808N-EP

8 NPN
8 NPN

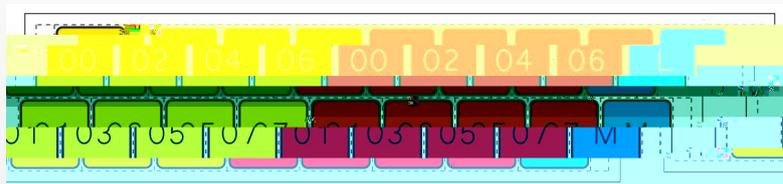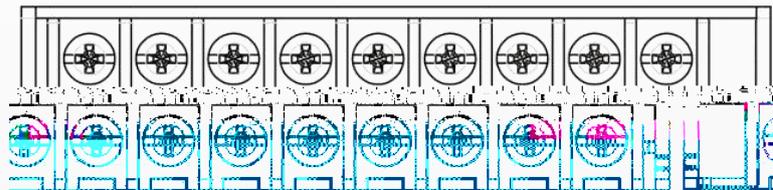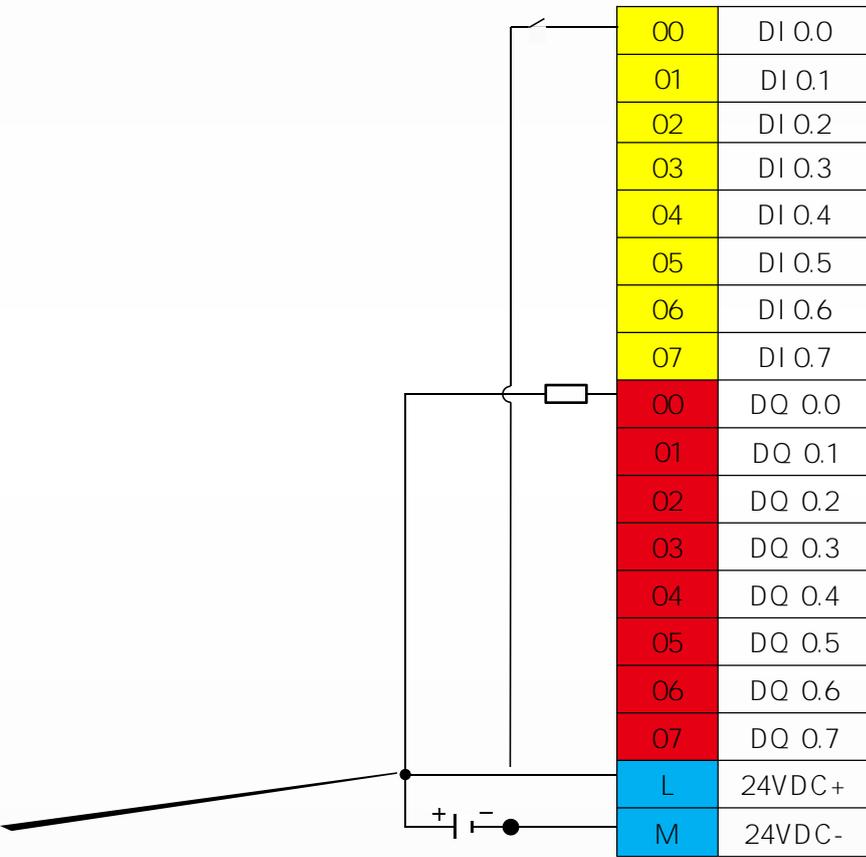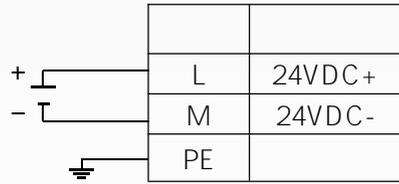




JP-D0016P-EP

16 PNP

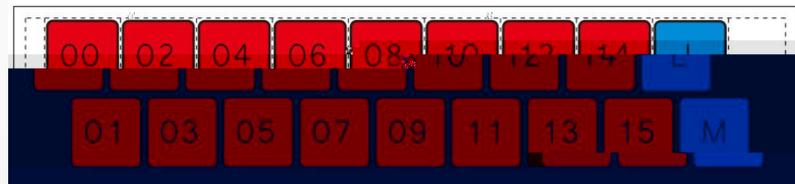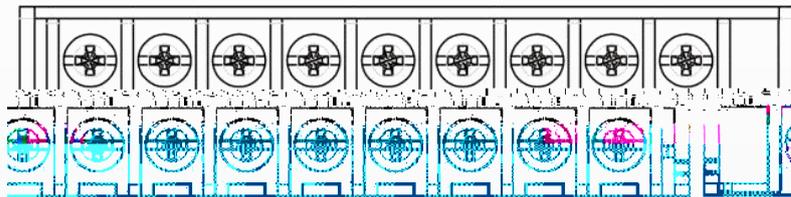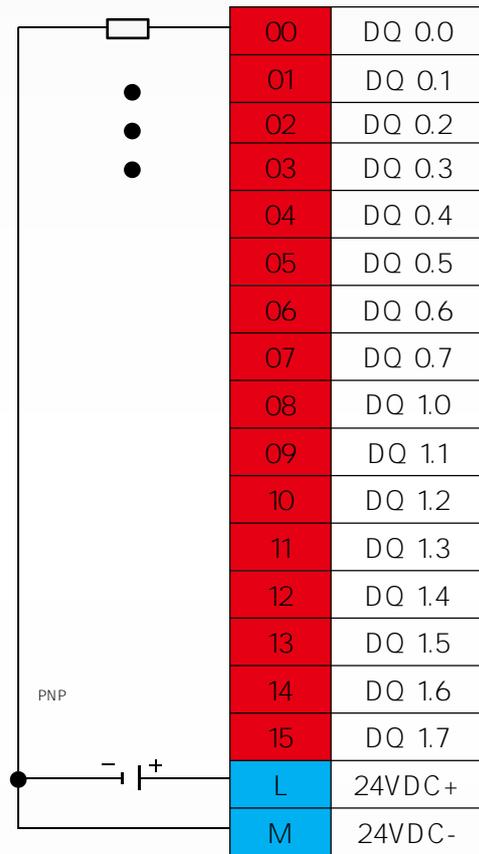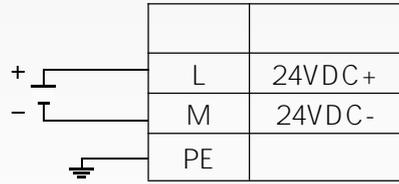

JP-D1616P-EP





16 PNP/NPN
16 PNP

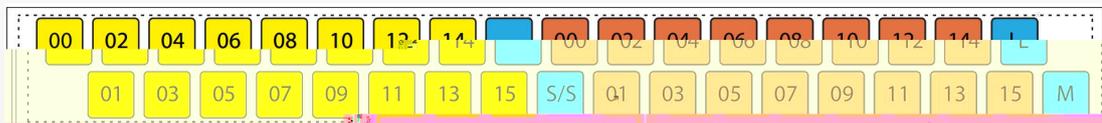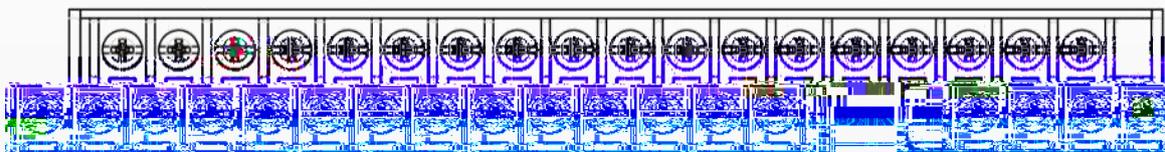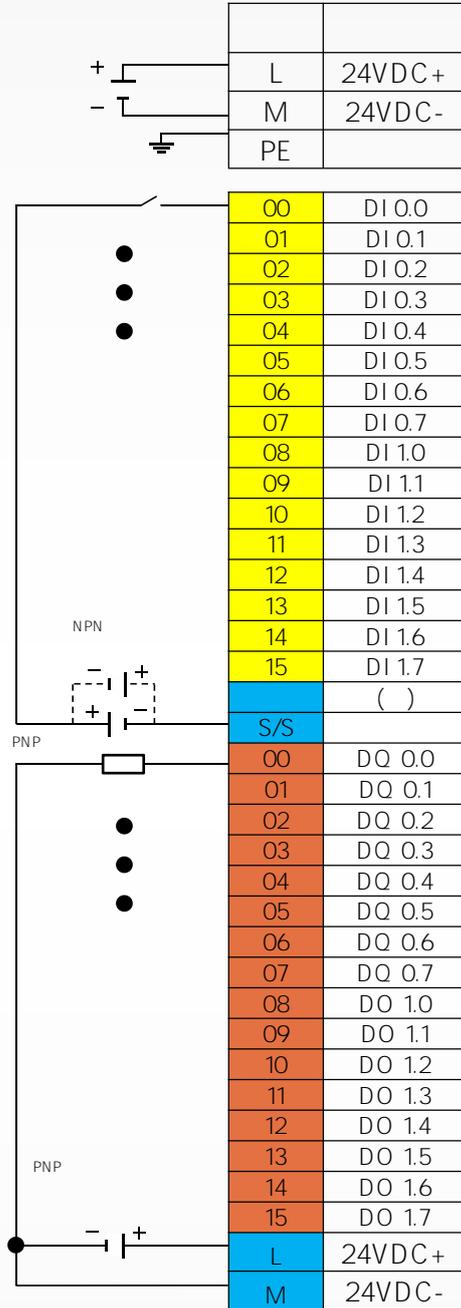

JP-D3200-EP

32

PNP/NPN

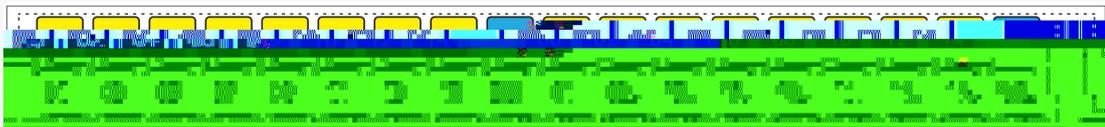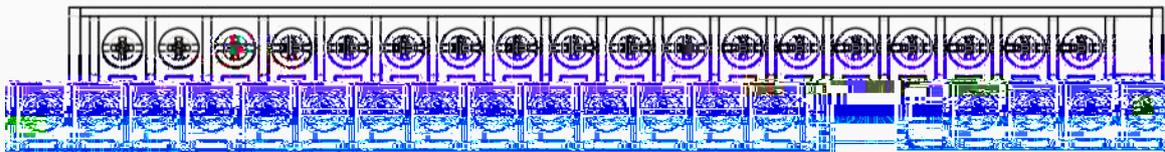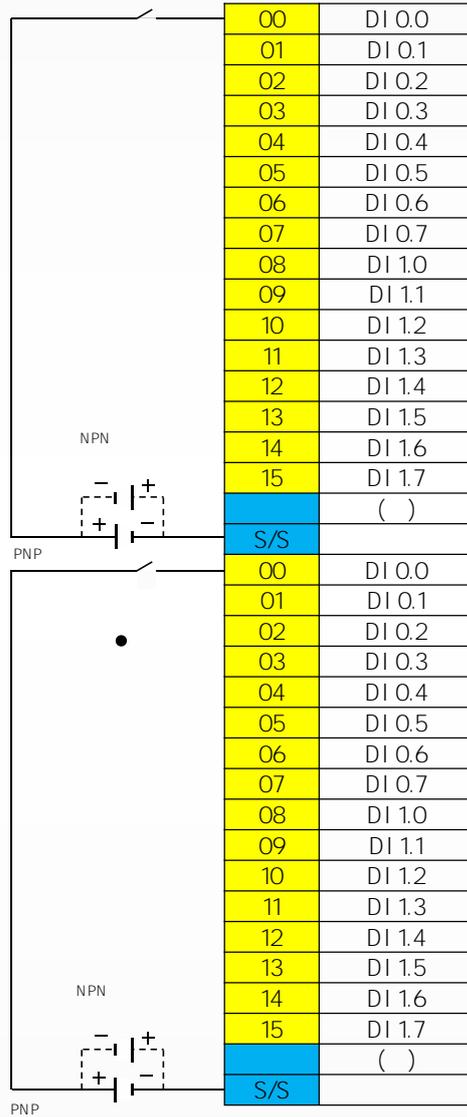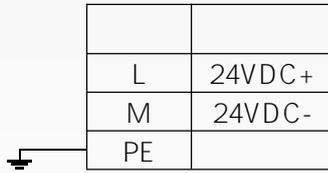


JP-D0032P-EP

32 PNP

L	24VDC+
M	24VDC-
PE	

00	DQ 0.0
01	DQ 0.1
02	DQ 0.2
03	DQ 0.3
04	DQ 0.4
05	DQ 0.5
06	DQ 0.6
07	DQ 0.7
08	DQ 1.0
09	DQ 1.1
10	DQ 1.2
11	DQ 1.3
12	DQ 1.4
13	DQ 1.5
14	DQ 1.6
15	DQ 1.7
L	24VDC+
M	24VDC-
00	DQ 0.0
01	DQ 0.1
02	DQ 0.2
03	DQ 0.3
04	DQ 0.4
05	DQ 0.5
06	DQ 0.6
07	DQ 0.7
08	DQ 1.0
09	DQ 1.1
10	DQ 1.2
11	DQ 1.3
12	DQ 1.4
13	DQ 1.5
14	DQ 1.6
15	DQ 1.7
L	24VDC+
M	24VDC-

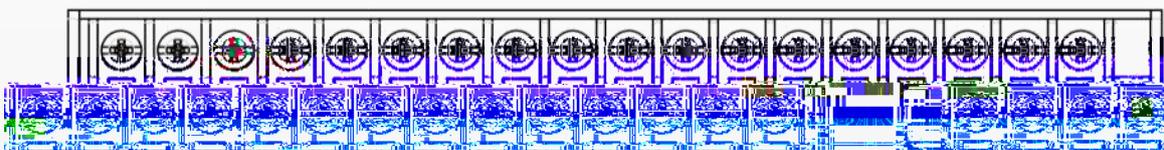

b b

JP-D0032N-EP

32 NPN

L	24VDC+
M	24VDC-
PE	



00	DQ 0.0
01	DQ 0.1
02	DQ 0.2
03	DQ 0.3
04	DQ 0.4
05	DQ 0.5
06	DQ 0.6
07	DQ 0.7
08	DQ 1.0
09	DQ 1.1
10	DQ 1.2
11	DQ 1.3
12	DQ 1.4
13	DQ 1.5
14	DQ 1.6
15	DQ 1.7
L	24VDC+
M	24VDC-
00	DQ 0.0
01	DQ 0.1
02	DQ 0.2
03	DQ 0.3
04	DQ 0.4
05	DQ 0.5
06	DQ 0.6
07	DQ 0.7
08	DQ 1.0
09	DQ 1.1
10	DQ 1.2
11	DQ 1.3
12	DQ 1.4
13	DQ 1.5
14	DQ 1.6
15	DQ 1.7
L	24VDC+
M	24VDC-





JP-DOO16R-EP



16

PNP/NPN

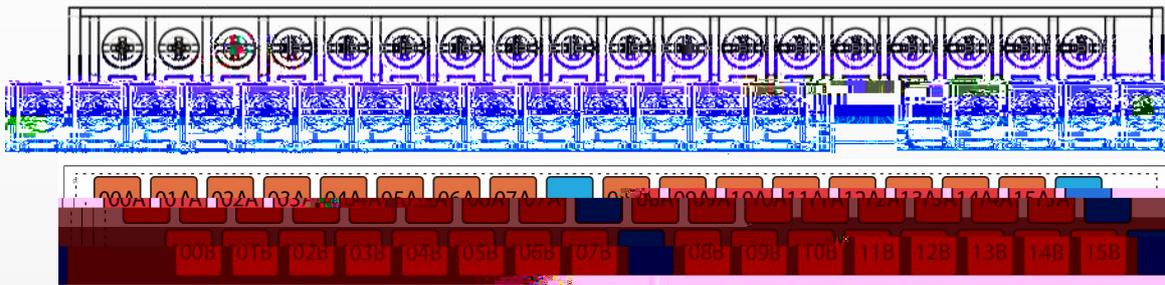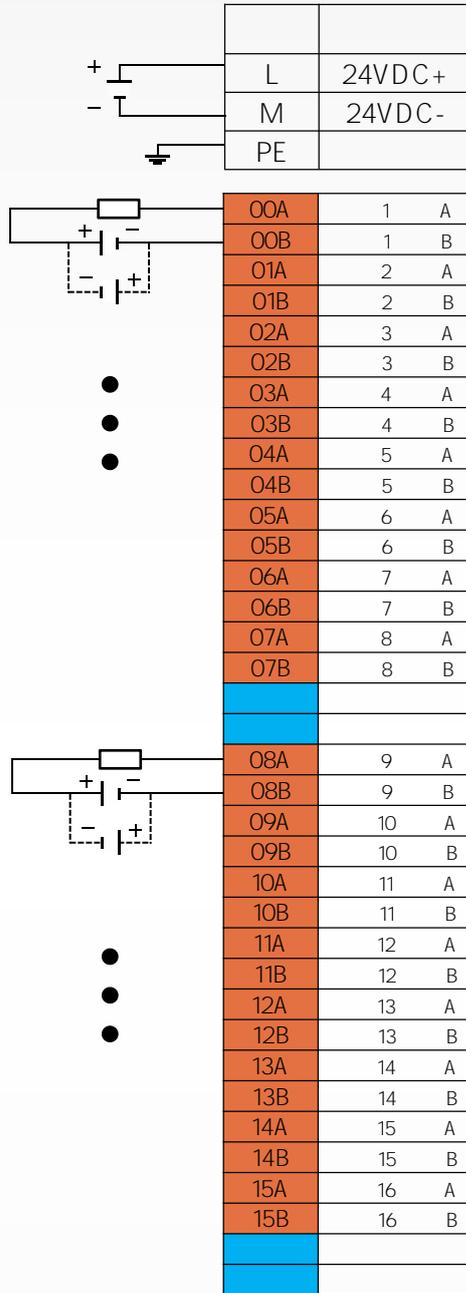

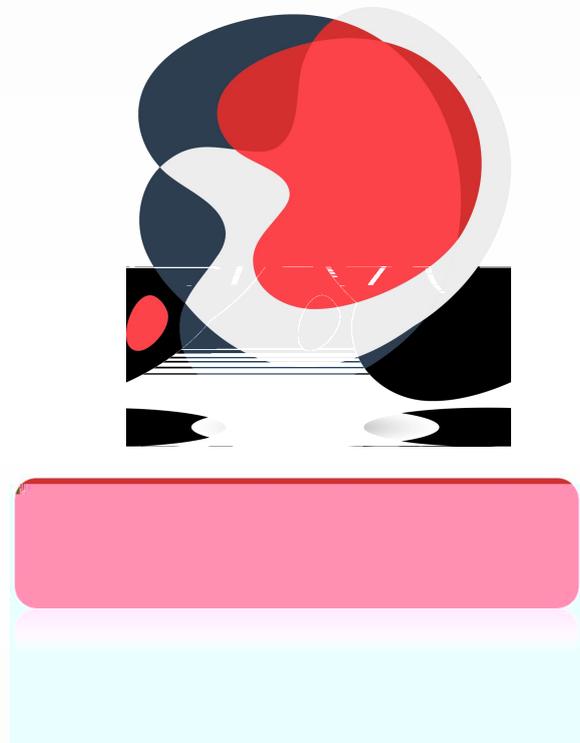

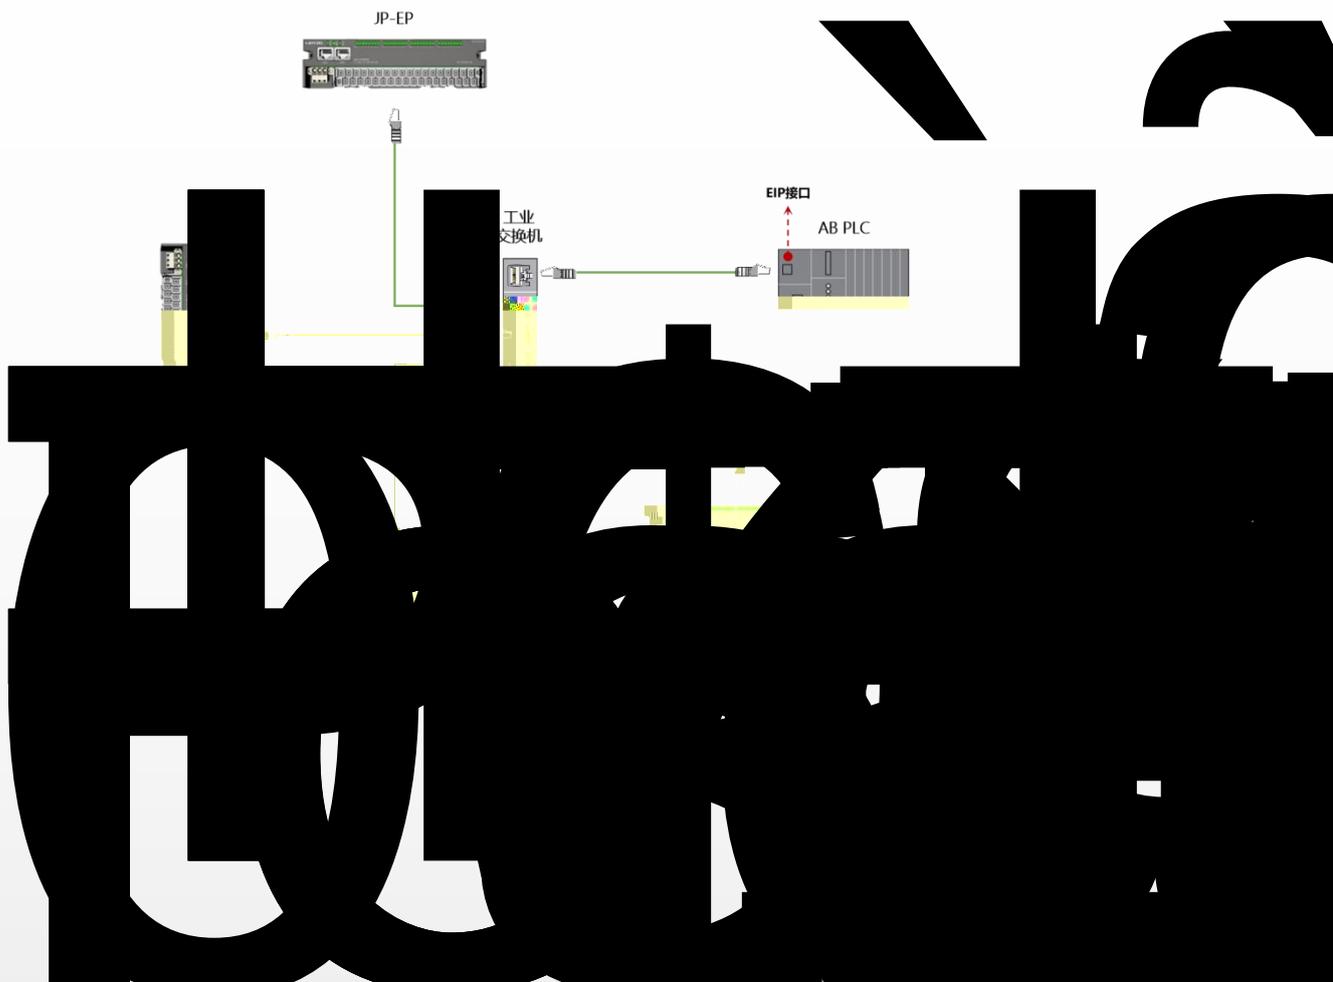

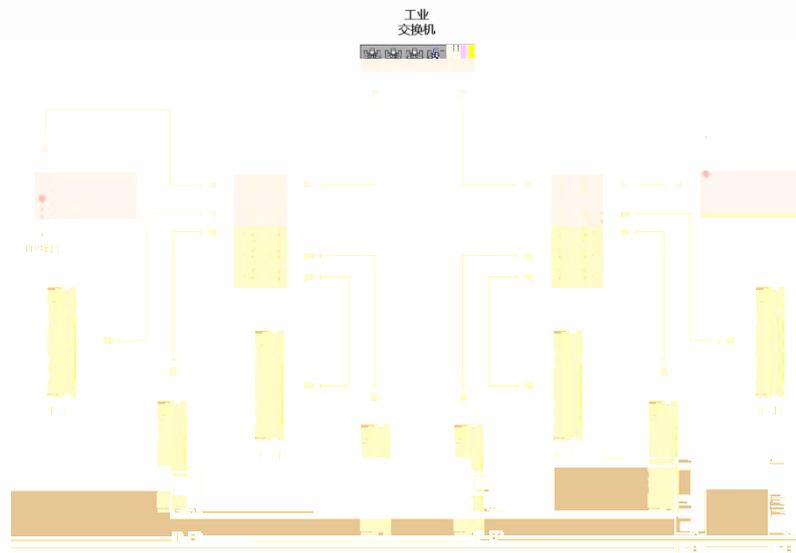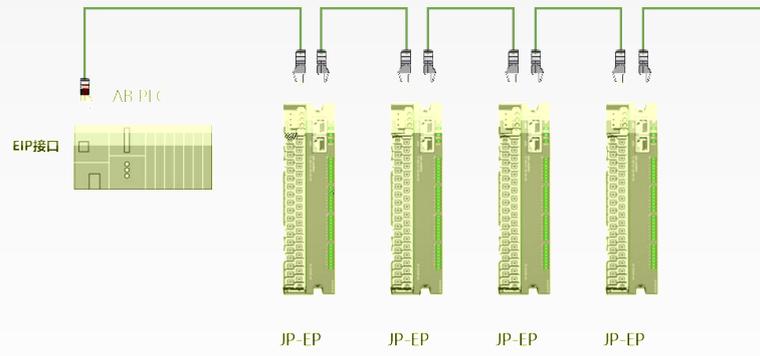

JP-EP DI/DQ/AI/AQ

16	2	In
6	12	In
16	2	Out

LAEconfig

LAEconfig

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Filter							
	Filter	ms		0-255				
				5				
BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode
DO Error_Mode bits0-7	For 7	For 6	For 5	For 4	For 3	For 2	For 1	For 0
BYTE 1	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For
DO Error_Value bits0-7	7	6	5	4	3	2	1	0
	DO Error_Mode bits	-		0-255	DQ0x	Bit0	DQ-00	bit "1"
				0	"Error Value[7..0]"	bit	"Error Mode"	DQ0x
	DO Error_Value bits	-		0-255	"Error Mode[7..0]"		bit	
				0	DQ			

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Filter							
	Filter	ms		0-255				
				5				

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode	DO Error_Mode
DO Error_Mode bits 0-7	For 7	For 6	For 5	For 4	For 3	For 2	For 1	For 0
BYTE 1	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For	DO Error Value For
DO Error_Value bits 0-7	7	6	5	4	3	2	1	0
	DO Error_Mode bits	-		0-255	DQ0.x	Bit0	DQ-0.0	bit
				0	“Error Mode”	“1”	“Error Value[7..0]”	bit
	DO Error_Value bits	-		0-255	“Error Mode[7..0]”			bit
				0	DQ			

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	Filter							
	Filter	ms		0-255				
				5				

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	DO Error_Mode							
DO Error_Mode bits0-7	For 7	For 6	For 5	For 4	For 3	For 2	For 1	For 0
BYTE 1	DO Error Value For							
DO Error_Value bits0-7	7	6	5	4	3	2	1	0
BYTE 2	DO Error_Mode							
DO Error_Mode bits8-15	For 15	For 14	For 13	For 12	For11	For 10	For 9	For 8
BYTE 3	DO Error Value For							
DO Error_Value bits8-15	15	14	13	12	11	10	9	8
:	16-31							

				0-255	DQ0.x			bit
	DO Error_Mode bits	-		0	DQ0.x Bit0	DQ-0.0	"Error Mode"	bit
					"1" "Error Value[7..0]"	bit		
					DQ0.x			
				0-255	"Error Mode[7..0]"			bit
	DO Error_Value bits	-		0	DQ			

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0					Filter			

Filter

ms

0-255

5

BIT No	BIT 7	BIT 6	BIT 5	BIT 4	BIT 3	BIT 2	BIT 1	BIT 0
BYTE 0	DO Er							

